

Spinner2 SCS6800

Operation mode

Recipe/Step: 1/0
RPM: 0
Time Left: 00:00
Press ENTER to Begin



Clear Error



Recipe mode


Recipe 1
Recipe 2
Recipe 3
Select Recipe

Abort



Run Recipe

Al foil wrapping on catcher pan

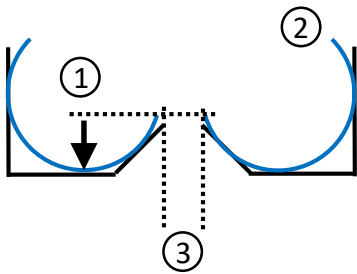


1. Enough room to catch left-over
2. Roll- up to inside
3. Clearance from rotating axis

R01 Previous Run Recipe
Select CLR Recipe ①
Step Step 0 ③
Step 1
Step 2

Clear Recipe ?
+ Yes ② - No

R01 Previous
S00 RAMP : 0.0
Pick DWELL : 0
Item RPM : 0
DSP_Type : None

Example spin profile
(AZ9260 for 10um, 4" chuck)

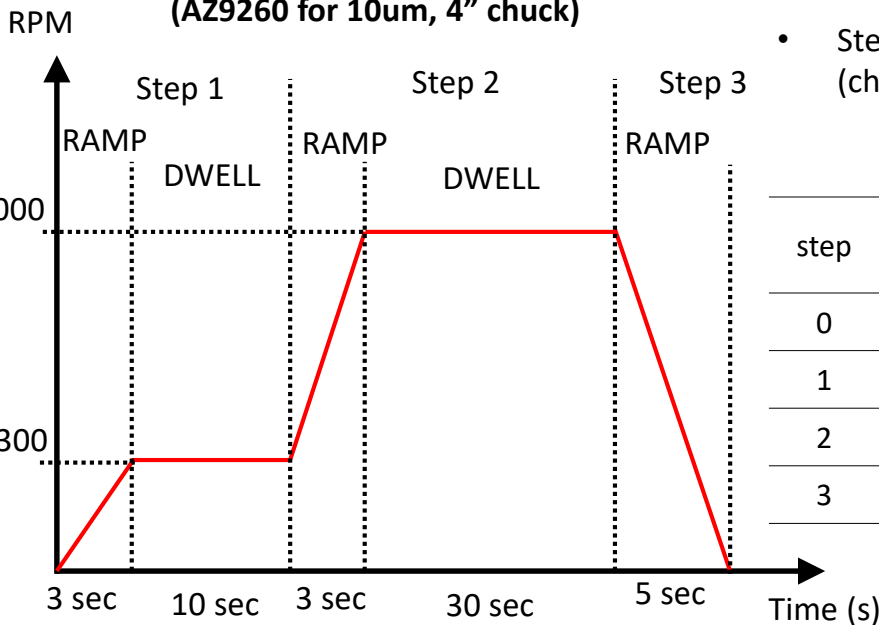

- Step 0 : Only fill the DSP_Type (chuck or sample size in diameter)

step	ramp	dwell	rpm	Dsp_type
0	0	0	0	4
1	3	10	300	None
2	3	30	2000	None
3	5	0	0	None